

Total Dissolved Solids Removal in Wastewater Using Roughing Filters

*O I Nkwonta, G M Ochieng

Department of Civil Engineering, Tshwane University of Technology, Private Bag x680, Pretoria 0001, South Africa

*Correspondence to: O I Nkwonta, onyinkwo2002@gmail.com

Published online: May 19, 2010

Abstract

Wastewater treatment using local available materials such as gravel and charcoal was investigated. The removal of TDS from roughing filters was evaluated for roughing filtration treatment system. Achieved results showed that roughing filters could be considered as a major pre-treatment process for wastewater, since they efficiently separate fine solids particles over prolonged periods without addition of chemicals. A pilot plant was designed at delcoal. The wastewater used was from delcoal. The design and sizing of the pilot plant was guided by wegelin design criteria. Gravel was used as a control medium since it is one of the most commonly used roughing filter media and because it was used in developing these criteria. In order to improve the performance of roughing filters, this process has been modified by applying local available material such as charcoal as an alternative filter media. The pilot plant was monitored for a continuous 90 days from commissioning. The overall function of the filter in removing parameters such as TDS is accepted using charcoal as an alternative filter media. Achieved results in this study showed that roughing filters might be considered as an efficient pretreatment process for mine water. It was also observed that in general performance, charcoal performed better than gravel. This observation could have resulted from the reason that charcoal has a slightly higher specific surface area and porosity respectively to enhance sedimentation and other filtration processes like adsorption, compared to gravel.

Keywords: Roughing filters; Sedimentation; Adsorption; Mine water; Gravel; Charcoal.

1. Introduction

Water is essential to life on our planet [1]. This fundamental resource is of such importance because no living organism can survive without water, [2]. Therefore, there is a demand for clean, unpolluted water in substantial supply. As a result, a prerequisite of sustainable development, therefore, must be obtained, to ensure uncontaminated streams, rivers, lakes and oceans [3]. Increasingly, human activities threaten the water sources on which we all depend. Water supplies continue to dwindle because of resource depletion and pollution, whilst demand is rising fast because of population growth, industrialisation, mechanisation and urbanisation [4]. This situation is particularly acute in the more arid regions of the world where water scarcity, and associated increases in water pollution, limit social and economic development and are linked closely to the prevalence of poverty, hunger and disease [4]. Over 70% of the water used in both rural and urban areas in South Africa is surface water drawn from rivers, streams, lakes, ponds and springs [5]. Water and soil contamination caused by acid mine drainage (AMD) is a significant environmental problem in some parts of the world, particularly in densely populated developing countries where human habitats are usually in close proximity to mine sites [6]. Water draining from coal and base metal mines frequently contains sulfuric acid and heavy metals at high levels, which could contaminate streams and agricultural lands, when the mine water or mine water-affected stream water is used for irrigation purposes. Entry of mine-originated contaminants into agricultural soils and streams may also occur during heavy rainfall events that cause over-bank flooding. Elevated concentrations of heavy metals in the soils and streams, accompanied with acidic pH, are likely to enhance uptake of heavy metals by plants and man, which poses a high health risk to the people who consume the contaminated agricultural products. This scenario thus calls for efficient and effective treatment of water from such sources before use, to avoid instances of water-borne and water related diseases such as typhoid fever and cholera. One of the systems derived to treat this water is known as Roughing filters.

Roughing filters can be considered as a major pretreatment process for mine water, since they efficiently separate fine solid particles over prolonged periods without addition of chemicals. Roughing filters are simple, efficient and cheap mine water pre-treatment technology compared to the conventional system. This is in terms of technical labour requirement, daily operation, maintenance costs and treatment efficiency and effectiveness.

Roughing filters are primarily used to separate fine solids from the water that are only partly or not retained at all by stilling basin or sedimentation tanks. Roughing filters mainly acts as physical filters and reduce the solid mass. However, the large filter surface area available for sedimentation and relatively small filtration rates also supports adsorption as well as chemical and biological processes. Therefore, besides solid matter separation, roughing filters also partly improve the bacteriological water quality and, to a minor extent, change some other water quality parameters such as colour or amount of dissolved organic matter [7]. Roughing filters are classified as deep-bed filters, whereby proper filter design promotes particle removal throughout

the depth of the filter bed, maximising the capacity of the filter to store removed solids. Particle removal efficiency in roughing filters is dependent on filter design, particulate, and water quality parameters [8].

2. Methods

In this study, horizontal roughing filters were selected as the pretreatment filters. Horizontal roughing filters perform better than other treatment filters, like Vertical roughing filters [8]. Horizontal roughing filters also have advantage of simplicity in design, cleaning, and operation.

To conduct this study, a pilot plant was constructed at delcoal in Mpumalanga province of South Africa. To enable a comparative study, two horizontal roughing filters were constructed. The design and sizing of the pilot plant was guided by the wegelin design criteria [9]. This study aimed at verifying these criteria based on gravel as a filter medium and other local available possible filter media, namely charcoal due to, it can serve as an alternative where gravel is not available. The filter medium was placed in different filters that consist of a chamber. The compartment was filled up of medium sizes of 15mm – 5mm decreasing in size in the direction of flow. The filter bed was provided with under drain system, so that it will allow cleaning of the filters after a certain period. A constant filtration rate of 1m/h was used.

Standard methods were adopted and analysis of the selected performance monitoring parameters. In this study, TDS was used as performance monitoring parameter. The filter inlet and outlet values of this parameter were monitored with the aim of analysing the removal efficiency of the roughing filters at the set field operating conditions. Monitoring was done on a daily basis due to development of excessive filter resistance and to prevent algal growth in the filter.

2.1 Design Concept

The design period, projected population growth and per capita water demand all have considerable impact on the size of roughing filters [10]. Since filter efficiency increases with decreasing filter material, it is good to use the smallest possible filter material or even to omit the larger filter materials [9] and to install only one finest filter medium. However, the roughing filtration technology requires coarse filter materials as denoted by its name [9]. The finest filter material should not be more than 4 mm to ease hydraulic filter cleaning. Filter material, which is too coarse however, has smaller filter efficiency and would therefore require a longer filter length to achieve the same reduction [9]. Some preliminary design guidelines for horizontal roughing filters were shown in Table 1.

Table 1: Shows the recommended guidelines for roughing filter design from researchers.

Parameters	Younger (1999)	Galvis (1998)	Wegelin (1996)	Tarmar (2006)	Evans (1999)
Water source	Mine water	Drinking water	Waste water	Drinking water	Drinking water
Filtration rate (m/h)	0.75	0.3-1.0	0.5-1.5	1.0	0.6
Filter length (m)	66	2	50	5	3
Gravel sizes (mm)	40-25	25-19	60-40	16-2	5-1
Compartment (m)	3	3	3	3	2

In this study, the filter design variables were based on previous research findings for mine water and drinking water treatments. Figure 1 shows the pilot plant scale units used in the research.

3. Results and Discussion

In order to monitor the quality of outlet water, parameter such as TDS is being compared between the inlet and outlet water. The removal of the mentioned parameter in the inlet and outlet are shown in figure 1. The filter ripened as biofilm layers develop around the coarse media and this is an important process that improved the horizontal roughing filter's ability to remove total dissolved solids. Ripening occurred between 4 to 5 weeks from Tables 1 and 2 respectively. In terms of individual performances, it was observed that in general charcoal performed better than gravel with 0.2%. This observation could have resulted from the reason that charcoal has a slightly higher specific surface area and porosity respectively to enhance the sedimentation and other filtration processes compared to gravel. It was also recorded that roughing filter was able to remove 94% of TDS during winter and 97% during summer using charcoal and gravel respectively.

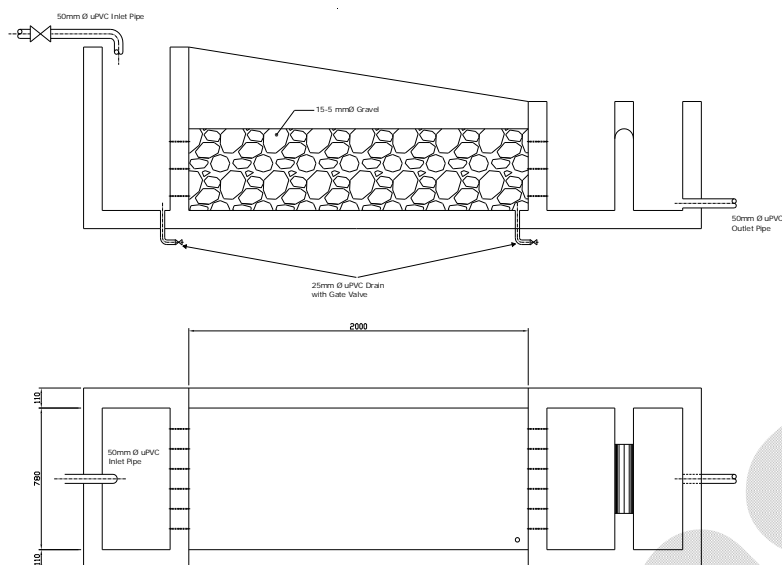


Figure 1: Pilot plant scale units used in the research.

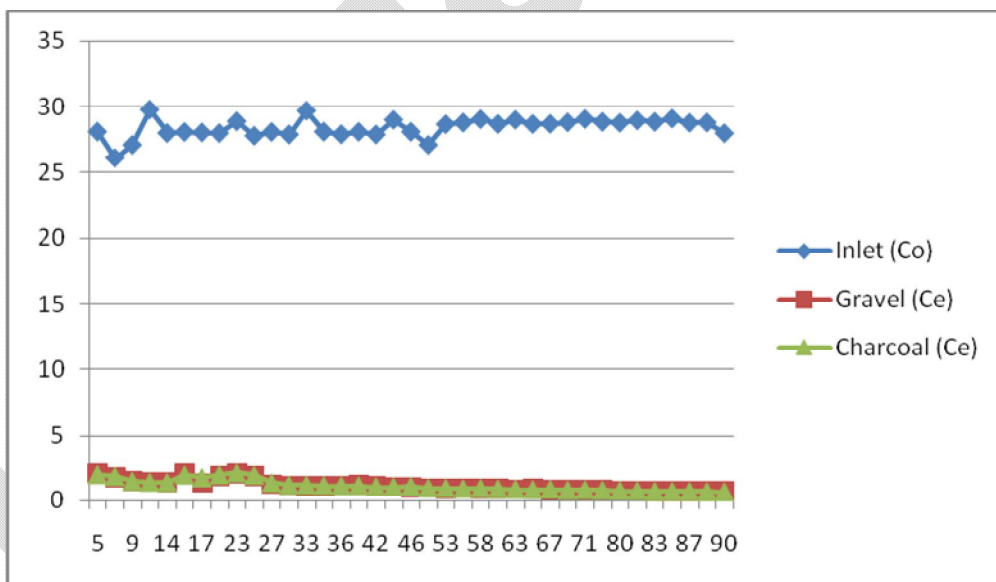


Figure 2: Concentration of TDS against days.

Table 2: Mean results for Total dissolved solids removal during winter.

Days	Inlet (Co) mg/ ℓ	Gravel (Ce) mg/ ℓ	Charcoal (Ce) mg/ ℓ
5	28.12	2.79	1.95
8	26.98	1.66	1.70
9	27.39	1.48	1.48
11	29.25	1.47	1.65
14	28.31	1.41	1.37
15	28.16	2.01	2.04
17	27.96	1.96	1.71
21	28.00	1.86	1.92
23	28.61	2.15	2.01
24	27.33	1.72	1.90
27	28.21	1.27	1.28
29	28.41	1.20	1.18
33	28.09	1.18	1.18
35	27.98	1.17	1.15
36	28.77	1.16	1.13
Percentage removal		94.2%	94.4%

Table 3: Mean results for Total dissolved solids removal during summer.

Days	Inlet (Co) mg/ ℓ	Gravel (Ce) mg/ ℓ	Charcoal (Ce) mg/ ℓ
39	28.08	1.19	1.13
42	27.88	1.08	1.05
44	28.98	1.05	1.05
46	28.08	1.02	1.06
51	27.09	0.95	0.95
53	28.65	0.93	0.93
55	28.78	0.95	0.90
58	29.03	0.92	0.92
61	28.67	0.89	0.88
63	28.98	0.88	0.86
64	28.67	0.89	0.83
67	28.68	0.84	0.85
70	28.79	0.79	0.79
71	29.04	0.80	0.82
73	28.83	0.82	0.78
80	28.76	0.78	0.76
81	28.94	0.75	0.74
83	28.83	0.73	0.68
85	29.08	0.74	0.69
87	28.76	0.72	0.68
89	28.78	0.71	0.67
90	27.97	0.71	0.65
Percentage removal		97%	97%

From the achieved result, it was noted that roughing filters does not require chemical use, energy input and mechanical parts, when compared with conventional system, such as membrane coagulation reactor. This is quite demanding in chemical use, energy input and mechanical parts as well as skilled manpower that are often unavailable, especially in rural areas of developing countries such as Tanzania, South Africa and Sri Lanka. In terms of individual performances, it was observed that in general charcoal performed better than gravel. This observation could have resulted from the reason that charcoal has a slightly higher specific surface area and porosity respectively to enhance sedimentation and other filtration processes such as adsorption compared to gravel. In terms of the general performance of the HRF, the following observations were made based on figure 1 that the roughing filter can be used as a pre-treatment method for wastewater treatment.

4. Conclusion

It was indicated that roughing filter can perform under Wegelin design criteria. It was shown that charcoal performs better than gravel in general removal efficiency with regards to the parameter that was put to test. Moreover, it could serve as an alternative where gravel is not available. Achieved result in the study shows that roughing filtration may be considered as an efficient pretreatment process in mine water treatment. The water recovered from this process can be reused in the mine. Due to time constraints, the durability test of the alternative filter material charcoal was not prioritised to be within the scope of this study. However, within the operating ranges and the study period, the media remained stable. It is recommended that further studies must be carried out to investigate the longevity, stability and possible rejuvenation of the material given that they are agricultural by-products stabilised by carbonation. Furthermore, lowering the filtration rate to 0.75m/h is suggested for gaining removal efficiencies in the filters.

5. Competing Interests

The authors declare that they have no competing interests.

6. Authors' Contributions

ON carried out the design and analysis for the parameter that was put to test and drafted the manuscript, while GM supervised the project.

7. Acknowledgement

The authors would like to thank Department of Water Care, Tshwane University of Technology, Pretoria, South Africa, for their assistance in water analysis. In addition, Tshwane University of Technology for offering the principal author scholarship and funds that enabled this project to be undertaken.

References

- [1] Miller GT, 1999. Environmental science: Working with the earth (7th edition). Wadsworth Publishing, Belmont, CA.
- [2] Kupchella CE, Hyland MC, 1993. Environmental Science: Living within the system of nature (3rd edition). Prentice-Hall, London, 579 pp.
- [3] International Institute for Environment and Development (IIED), 2002. Breaking new ground: mining, minerals, and sustainable development. Earthscan Publications, London.
- [4] Falkenmark M, 1994. The dangerous spiral: near-future risks for water-related eco-conflicts. In: Proceedings of the ICRC Symposium "Water and War: Symposium on Water in Armed Conflicts", International Committee of the Red Cross, Montreux, Switzerland, 21-23 November 1994. 16 pp.
- [5] Department of Water Affairs and Forestry, 2004. Olifants Water Management Area: Internal Strategic Perspective. Report P WMA 04/0000/00/0304. Department of Water Affairs and Forestry, Pretoria.
- [6] Lee CH, 2003. Assessment of contamination load on water, soil and sediment affected by the Kongjujeil mine drainage, Republic of Korea. Environmental Geology, 44: 501-515.
- [7] Wegelin M, 1996. Surface water treatment by roughing filters. A design, construction and operation manual. Swiss Federal Institute for Environmental Science and Technology (EAWAG) and Department of Water and Sanitation in Developing Countries (SANDEC).
- [8] Boller M, 1993. Filter mechanism in roughing filters. Journal of Water Supply Research and Technology - Aqua, 42(3): 174.
- [9] Wegelin M, 1986. Horizontal flow roughing filtration (HRF). Design, Construction and Operation Manual. IRCWD Report No 06/86, 1986.

- [10] Galvis G, Visscher JT, Latorre J, 1998. Multi-stage filtration and innovation water treatment technology. International Reference Centre for Community Water Supply and Sanitation, The Hague, Netherlands, and Universidad Del Valle Instituto CINARA, Cali, Colombia.
- [11] Younger PL, 2001. Passive treatment of ferruginous mine water using high surface area media. Elsevier Science Ltd., Great Britain. ISBN: 978-0-9802623-5-3.
- [12] Tamar R, Losleben P, 2004. Study of Horizontal Roughing Filtration in Northern Ghana as Pretreatment for Highly Turbid Dugout Water B.A. Environmental Science and Engineering, Rice University.
- [13] Evans HL, 1999. Portfolio submitted for part fulfillment of the degree of Engineering Doctorate in Environmental Technology. University of Surrey, Guildford, Surrey, U.K.
- [14] Wolters H, Smet JEM, Galvis G, 1989. Upflow roughing filtration in pre-treatment methods for community water supply. International Reference Centre for Community Water Supply and Sanitation, The Hague, Netherlands. pp. 109–125.